


keystudio

BMP180 Digital Barometric Pressure Sensor Module for Arduino

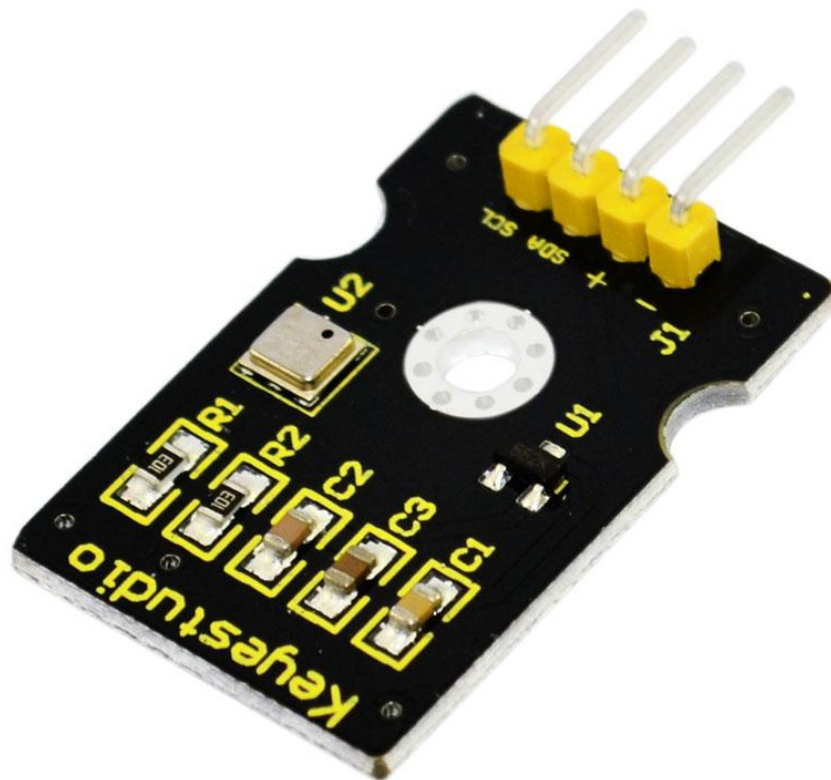

Introduction

keystudio BMP180 is a pressure sensor with high precision, compact design and low power consumption. It can be used in mobile devices. Minimum absolute accuracy reaches 0.03hpa with only 3uA power consumption.

Specification

Size: 35mm x 20mm

1.8V to 6V Supply Voltage

Max I2C Speed: 3.5Mhz

Low power consumption - 0.5uA at 1Hz

I2C interface

low noise - up to 0.02hPa (17cm)


Full calibrated

Pressure Range: 300hPa to 1100hPa (+9000m to -500m)

www.keystudio.com

keystudio

Connection Diagram

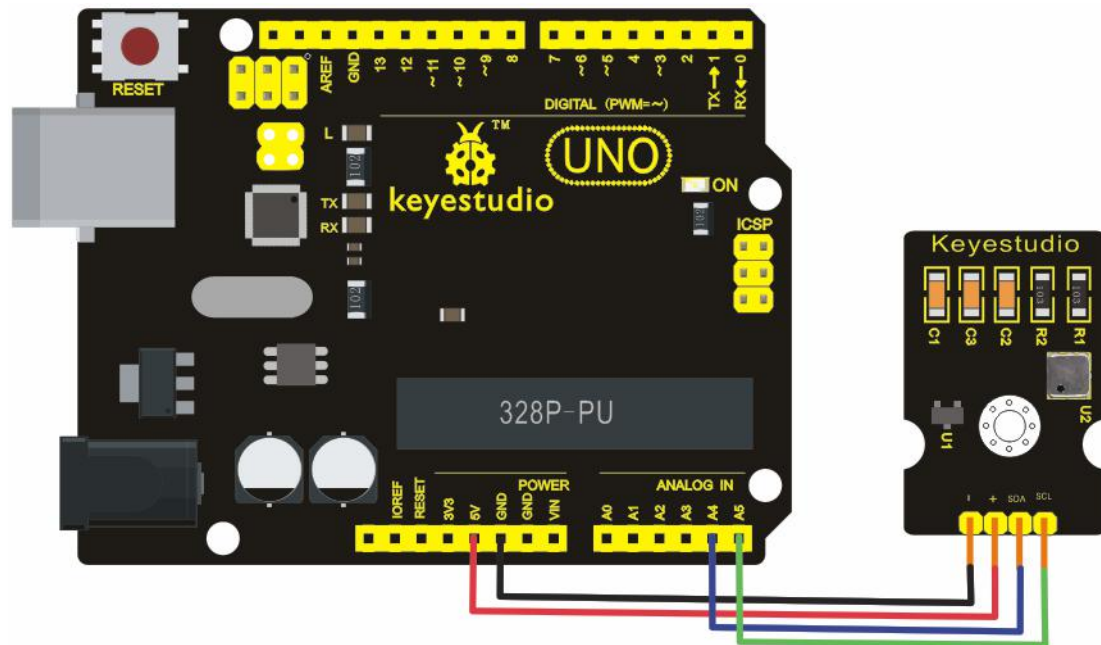

Sample Code

```
#include <Wire.h>
#define BMP085_ADDRESS 0x77 // I2C address of BMP085
const unsigned char OSS = 0; // Oversampling Setting
// Calibration values
int ac1;
int ac2;
int ac3;
unsigned int ac4;
unsigned int ac5;
unsigned int ac6;
int b1;
int b2;
int mb;
int mc;
int md;
// b5 is calculated in bmp085GetTemperature(...), this variable is also used in
bmp085GetPressure(...)
// so ...Temperature(...) must be called before ...Pressure(...).
long b5;
void setup(){
  Serial.begin(9600);
```

keystudio

```
Wire.begin();
bmp085Calibration();

}

void loop()
{
  float temperature = bmp085GetTemperature(bmp085ReadUT()); //MUST be called first
  float pressure = bmp085GetPressure(bmp085ReadUP());
  float atm = pressure / 101325; // "standard atmosphere"
  float altitude = calcAltitude(pressure); //Uncompensated caculation - in Meters
  Serial.print("Temperature: ");
  Serial.print(temperature, 2); //display 2 decimal places
  Serial.println("deg C");
  Serial.print("Pressure: ");
  Serial.print(pressure, 0); //whole number only.
  Serial.println(" Pa");
  Serial.print("Standard Atmosphere: ");
  Serial.println(atm, 4); //display 4 decimal places
  Serial.print("Altitude: ");
  Serial.print(altitude, 2); //display 2 decimal places
  Serial.println(" M");
  Serial.println();//line break
  delay(1000); //wait a second and get values again.
}

// Stores all of the bmp085's calibration values into global variables
// Calibration values are required to calculate temp and pressure
// This function should be called at the beginning of the program
void bmp085Calibration()
{
  ac1 = bmp085ReadInt(0xAA);
  ac2 = bmp085ReadInt(0xAC);
  ac3 = bmp085ReadInt(0xAE);
  ac4 = bmp085ReadInt(0xB0);
  ac5 = bmp085ReadInt(0xB2);
  ac6 = bmp085ReadInt(0xB4);
  b1 = bmp085ReadInt(0xB6);
  b2 = bmp085ReadInt(0xB8);
  mb = bmp085ReadInt(0xBA);
  mc = bmp085ReadInt(0xBC);
  md = bmp085ReadInt(0xBE);
}
```

keystudio

```
// Calculate temperature in deg C

float bmp085GetTemperature(unsigned int ut){
    long x1, x2;
    x1 = (((long)ut - (long)ac6)*(long)ac5) >> 15;
    x2 = ((long)mc << 11)/(x1 + md);
    b5 = x1 + x2;
    float temp = ((b5 + 8)>>4);
    temp = temp /10;
    return temp;
}

// Calculate pressure given up
// calibration values must be known
// b5 is also required so bmp085GetTemperature(...) must be called first.
// Value returned will be pressure in units of Pa.
long bmp085GetPressure(unsigned long up){
    long x1, x2, x3, b3, b6, p;
    unsigned long b4, b7;
    b6 = b5 - 4000;
    // Calculate B3
    x1 = (b2 * (b6 * b6)>>12)>>11;
    x2 = (ac2 * b6)>>11;
    x3 = x1 + x2;
    b3 = (((((long)ac1)*4 + x3)<<OSS) + 2)>>2;
    // Calculate B4
    x1 = (ac3 * b6)>>13;
    x2 = (b1 * ((b6 * b6)>>12))>>16;
    x3 = ((x1 + x2) + 2)>>2;
    b4 = (ac4 * (unsigned long)(x3 + 32768))>>15;
    b7 = ((unsigned long)(up - b3) * (50000>>OSS));
    if (b7 < 0x80000000)
        p = (b7<<1)/b4;
    else
        p = (b7/b4)<<1;
    x1 = (p>>8) * (p>>8);
    x1 = (x1 * 3038)>>16;
    x2 = (-7357 * p)>>16;
    p += (x1 + x2 + 3791)>>4;
    long temp = p;
    return temp;
}

// Read 1 byte from the BMP085 at 'address'
```

keystudio

```
char bmp085Read(unsigned char address)
{
    unsigned char data;

    Wire.beginTransmission(BMP085_ADDRESS);
    Wire.write(address);
    Wire.endTransmission();
    Wire.requestFrom(BMP085_ADDRESS, 1);
    while(!Wire.available())
        ;
    return Wire.read();
}

// Read 2 bytes from the BMP085
// First byte will be from 'address'
// Second byte will be from 'address'+1
int bmp085ReadInt(unsigned char address)
{
    unsigned char msb, lsb;

    Wire.beginTransmission(BMP085_ADDRESS);
    Wire.write(address);
    Wire.endTransmission();
    Wire.requestFrom(BMP085_ADDRESS, 2);
    while(Wire.available()<2)
        ;
    msb = Wire.read();
    lsb = Wire.read();
    return (int) msb<<8 | lsb;
}

// Read the uncompensated temperature value
unsigned int bmp085ReadUT(){
    unsigned int ut;
    // Write 0x2E into Register 0xF4
    // This requests a temperature reading
    Wire.beginTransmission(BMP085_ADDRESS);
    Wire.write(0xF4);
    Wire.write(0x2E);
    Wire.endTransmission();
    // Wait at least 4.5ms
    delay(5);
    // Read two bytes from registers 0xF6 and 0xF7
    ut = bmp085ReadInt(0xF6);
    return ut;
}
```

keyestudio

```
}  
// Read the uncompensated pressure value  
  
unsigned long bmp085ReadUP(){  
    unsigned char msb, lsb, xlsb;  
    unsigned long up = 0;  
    // Write 0x34+(OSS<<6) into register 0xF4  
    // Request a pressure reading w/ oversampling setting  
    Wire.beginTransmission(BMP085_ADDRESS);  
    Wire.write(0xF4);  
    Wire.write(0x34 + (OSS<<6));  
    Wire.endTransmission();  
    // Wait for conversion, delay time dependent on OSS  
    delay(2 + (3<<OSS));  
    // Read register 0xF6 (MSB), 0xF7 (LSB), and 0xF8 (XLSB)  
    msb = bmp085Read(0xF6);  
    lsb = bmp085Read(0xF7);  
    xlsb = bmp085Read(0xF8);  
    up = (((unsigned long) msb << 16) | ((unsigned long) lsb << 8) | (unsigned long) xlsb) >>  
(8-OSS);  
    return up;  
}  
  
void writeRegister(int deviceAddress, byte address, byte val) {  
    Wire.beginTransmission(deviceAddress); // start transmission to device  
    Wire.write(address); // send register address  
    Wire.write(val); // send value to write  
    Wire.endTransmission(); // end transmission  
}  
  
int readRegister(int deviceAddress, byte address){  
    int v;  
    Wire.beginTransmission(deviceAddress);  
    Wire.write(address); // register to read  
    Wire.endTransmission();  
  
    Wire.requestFrom(deviceAddress, 1); // read a byte  
  
    while(!Wire.available()) {  
        // waiting  
    }  
    v = Wire.read();  
    return v;  
}
```

keystudio

```
float calcAltitude(float pressure){  
    float A = pressure/101325;  
    float B = 1/5.25588;  
  
    float C = pow(A,B);  
    C = 1 - C;  
    C = C /0.0000225577;  
    return C;  
}
```